



Viridi™

Battery Energy Storage System



Viridi RPS65-200

POINT-OF-USE ENERGY STORAGE SOLUTIONS

KEY BENEFITS

- Viridi Fail-Safe Anti-Propagation Technology to prevent Li-Ion Fire
- Zero emissions
- On-Grid Charging
- Off-Grid Discharging
- On-Grid Discharging
- Generator Hybridization Operation
- Micro-Grid Forming & Participation
- Minimal Noise



DISCHARGE PARAMETERS ¹

- Minimum to maximum operating temperature: -10°C to 45°C (14°F to 113°F)
- Maximum continuous power:
 - 65 kW at 480VAC 3Φ / 208VAC 3Φ
 - 30 kW at 240VAC 1Φ
- Maximum In-Rush Power:
 - 100 kW at 480VAC 3Φ for 5 minutes

CHARGE PARAMETERS ²

- Minimum to maximum operating temperature: -10°C to 45°C (14°F to 113°F)
- Maximum continuous power:
 - 40 kW at 480VAC 3Φ / 208VAC 3Φ
 - 30kW at 240VAC 1Φ

RPS65-200 Battery Energy Storage System

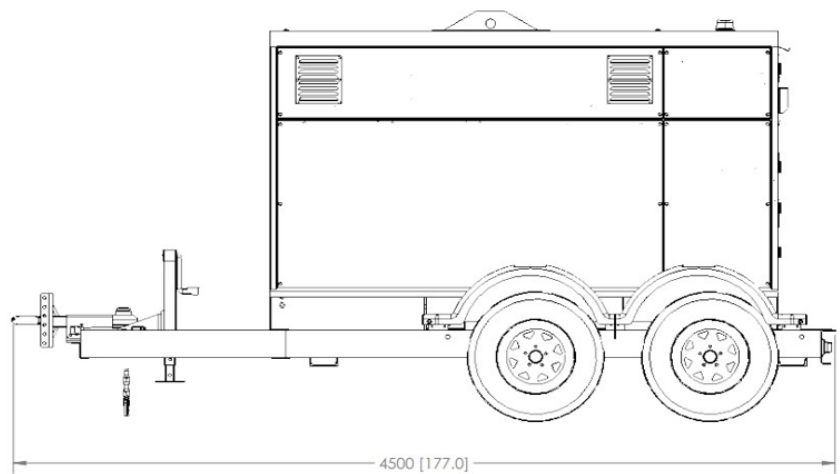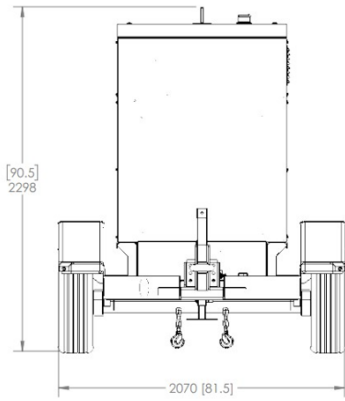

PHYSICAL PARAMETERS

- RPS65-200 Length:
 - Excluding trailer: 108.78 in.
 - Including trailer: 177 in.
- RPS65-200 Width:
 - Excluding trailer: 44.88 in.
 - Including trailer: 81.5 in.
- RPS65-200 Height
 - Excluding trailer: 74.5 in.
 - Including trailer: 90.5 in.
- Skid Mounted Unit Weight: 7,250 lbs.
- Trailer Mounted Weight: ≤10,000 lbs.

STORAGE

- 195.6kWh DC-Nameplate
- 173.6 kWh DC-Usable
- 4,000 Cycles at Usable Capacity³

ELECTRICAL FEATURES

- 2X Aux CS Twist Lock Receptacles
 - 1 Phase-240VAC, 50A
- 2X Aux NEMA 5-20R
 - 1 Phase-120VAC, 20A
- 2 X AC Cam-Locks Switchable
 - 3 Phase-208VAC, 400A or
 - 3 Phase-480VAC, 400A
- 1x CS Twist Lock Plug (Charging Outlet)
 - 1 Phase-240VAC, 50A

PARALLELING OPERATION

- Parallel with other RPS65-200 units
- Parallel with other “DEIF” controlled paralleling generators
- Total paralleling capability of up to 16 systems for 1.04MWAC and 3.2MWh nominal

MECHANICAL FEATURES

- Skid-Based Design
- Compatible Towable Trailers
- Side-Access Fork-Lift Pockets
- Single-Top Lift Point
- Full Custom Enclosure
- 45 in. x 75 in. x 109 in

CERTIFICATIONS

- UN 38.3 (cell, module)
- UL 1642 (cell) UL Recognized Component
- UL 2580 (cell) UL Recognized Component
- UL 1741 (inverter) cTÜV SÜDus Listed
- IEEE 1547 (inverter) cTÜV SÜDus Listed
- UL 1973 (RPS50 pack) cTÜVus Listed
- UL 9540 (BESS) cTÜVus Listed

¹ Operating temperature range mirrors battery cell specifications. The Battery Management System (BMS) is programmed to manage the pack utilization rate to control the internal pack thermal conditions and prevent operation outside of pack interior temperature limits, which can be tailored for different applications/installations. The BMS communicates applicable operating conditions continuously via CAN bus to the inverter and/or system controller.

² Optimal minimum to maximum charge operating temperature: 0°C to +40° C. Charging and Discharging power derates -10°C to 0°C and +40° to +45°C.

³ Cycle life can be optimized for individual applications and operating conditions (depth of discharge, duty cycle, temperature, charge/discharge rate).

FOR MORE INFORMATION

sales@viridiparente.com 716.968.8658