



Modular Energy Storage For Internal Installations



Deploy Fail-Safe Energy Storage to meet any site's needs with **RPSLink** Modular Energy Storage System

KEY BENEFITS


- Reduce On-Bill electricity costs by utilizing stored energy during high-priced peak periods and recharging during off-peak hours
- Maximize on-site renewables like wind and solar by capturing energy when they're overproducing for use later
- Decarbonize facility's energy use by utilizing clean stored energy when the grid is at its dirtiest
- Power through grid interruptions and outages with backup power stored on-site, Behind-The-Meter

SAFETY

- All Viridi battery packs equipped with passive Fail-Safe thermal management and antipropagation technology to prevent Li-Ion battery fire
- Fail-Safe technology allows for unique permitting opportunities including BESS in and around occupied spaces and critical equipment.
- Battery packs are mounted on modular racking for convenient deployment inside or outside the building, often without the need for incremental fire suppression or containment enclosures

RPSLinkIN

Modular Energy Storage For Internal Installations

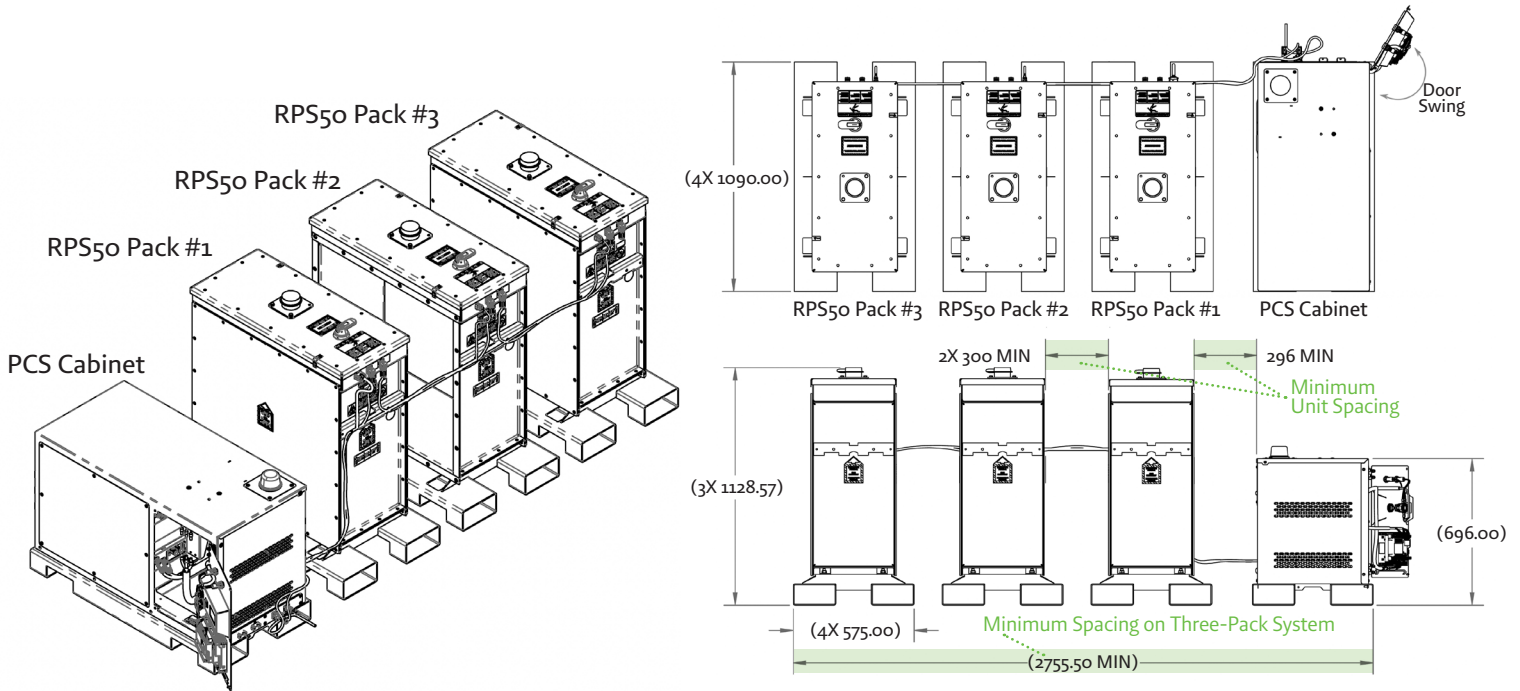

Model	480V-3p-150kWh-30kW	480V-3p-100kWh-20kW	208V-3p-150kWh-30kW	208V-3p-100kWh-15kW	208V-3p-50kWh-10kW
System Contains	(1) PCS Cabinet (3) RPS50 Packs	(1) PCS Cabinet (2) RPS50 Packs	(1) PCS Cabinet (3) RPS50 Packs	(1) PCS Cabinet (2) RPS50 Packs	(1) PCS Cabinet (1) RPS50 Pack
Rated Capacity (kWh)	146.7	97.8	146.7	97.8	48.9
Effective Capacity (kWh)	130.2	86.8	130.2	86.8	43.4
Max Continuous Power, Charging/Discharging (kW)	30	20	30	15	10
Voltage	480V 3p		208V 3p		
Max Continuous Current, Charging/Discharging (A)	36	24	83	41	28
Cycle Life	4,000+ charge / discharge cycles ²				
Communication / Telematics	BESS uses WIFI / LAN / 5G / LTE to report EMS and performance data to Viridi VISTA®. RPSLink can communicate through building WIFI or LAN but this is not required.				
Auto-Transfer Switch (optional)	An external Sinexcel Intelligent Transfer Switch is required for the battery to provide backup power in a utility outage.				
Operating Temp. Range	-10°C to 45°C (14°F to 113°F) ¹				
Dimensions & Weight, PCS Cabinet including mounting skid (in/mm)	42.9" / 1090mm wide --- 27.4" / 696mm tall --- 22.6" / 575mm deep --- 300lbs				
Dimensions & Weight, RPS50 Pack including mounting skid (ea)	42.9" / 1090mm wide --- 44.4" / 1128mm tall --- 22.6" / 575mm deep --- 1,100lbs				
Certifications	UN 38.3 (cell/module), UL 1642 (cell), UL1973 (pack cETLus recognized), UL 9540A (cell/module/pack tested), UL 1741 & IEEE 1547 (Sinexcel PWS2-30P-NA Inverter)				

¹ Operating temperature range mirrors battery cell specifications. The Battery Management System (BMS) is programmed to manage the pack utilization rate to control the internal pack thermal conditions and prevent operation outside of pack interior temperature limits, which can be tailored for different applications/installations. The BMS communicates applicable operating conditions continuously via CAN bus to the inverter and/or system controller.

² Cycle life can be optimized for individual applications and operating conditions (depth of discharge, duty cycle, temperature, charge/discharge rate).

FOR MORE INFORMATION

sales@viridiparente.com

716.968.8658

